

NVS2801-Plus

NEXTO DI
www.nextodi.com




Unrivaled Performance

Copy 128GB in 5 mins

Built in slot



Optional adapter



NEXTO VIDEO STORAGE DOC+



Small & Light

- Palmtop size with light weight (430g/15oz).
- Perfect companion for Documentary DP.



Preview 2K / 4K

- Show video on 2.4' TFT LCD.
(Limited preview performance for 4K)
DV, DVCPRO HD
AVCHD, H.264, AVC-Intra
MPEG2 4:4:4 / 4:2:2 / 4:2:0
XAVC 2K/4K, AVC Ultra 2K



Simultaneously Backup up to TWO drives with a *single operation* (MCopy)

- *Create two copies* with 1 internal hard drive and 1 external USB3.0 (or RAID) drive



Limitless capacity

- One click easy exchange of internal drive .
- Compatible with 2.5" SATA HDD/SSD.
(9.5mm or less height)



Backup from various memory cards

- Built in SxS / CFast / SD slot
- Supports XQD / P2 / CF through optional adapter.
- Supports FAT32, exFAT, UDF, HFS+
- The only field backup storage that supports 4GB+ files.




Memory card can be connected without any external power source

- Supplies power to the "Card reader" port from the internal battery.



XCopy Backup Performance

*(Copy time) for 128GB memory card

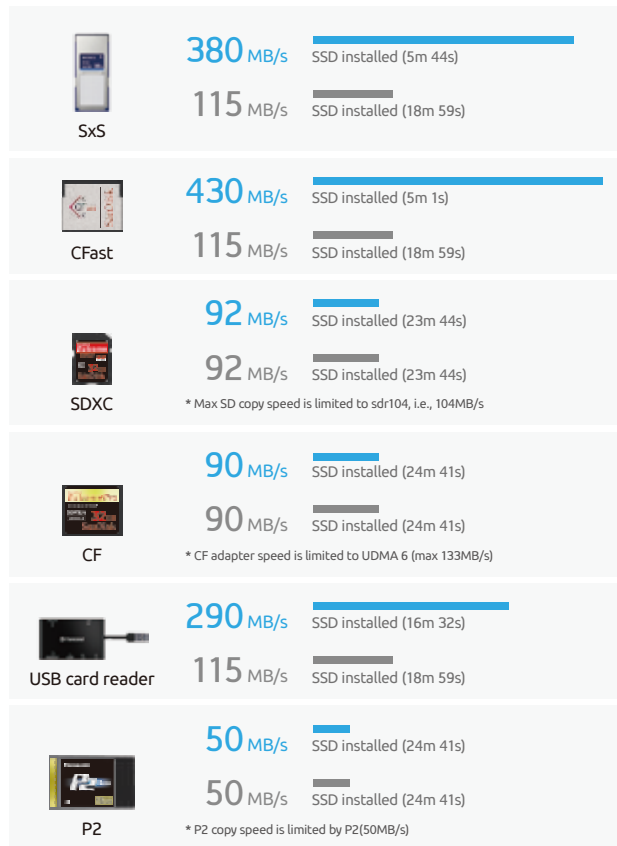

Make multiple backup on location for data safety

MCopy("Multi-Copy") function copies data in a memory card onto NVS2801+ and external hard drive at the same time for increasing data safety. Attach a USB external hard drive to make two copies at the same time with a single click.

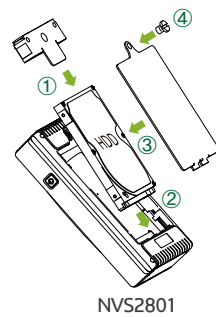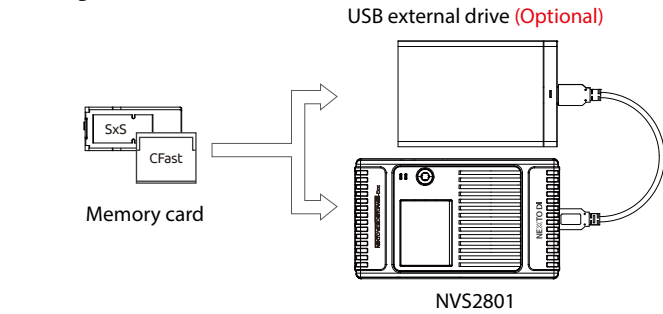


Exchangeable internal drive

The internal drive of NVS2801+ can be exchanged by user.

- ① Insert silicon rubber jacket to the hard drive or SSD.
- ② Slide in the drive to the internal drive slot of NVS2801+.
- ③ Install the aluminum back cover to the NVS2801+.
- ④ Use a coin to tighten the screws on the aluminum back cover.

Technical Specifications

Model Name	NEXTO VIDEO STORAGE Doc+	
Model Number	NVS2801-Plus	
LCD	2.4" Color TFT LCD: 320*240, 64K color	
Memory Support	Built in slot : SxS(Pro/Pro+/-1), CFast(1.1&2.0), SD(SDHC/SDxC with UHS support)	
Storage	Internal Drive : 2.5" SATA SSD with 9.5mm and less height.	
File System	Memory card : FAT16/32, exFAT, UDF, HFS+ Internal drive: exFAT USB external drive: exFAT	
Video Preview	DV, DVCPR HD AVCHD, H.264, AVC-Intra MPEG2 4:4:4 / 4:2:2 / 4:2:0	XAVC 2K/4K, AVC Ultra 2K/4K XF-AVC 2K/4K, PRORES 2K/4K DNxHD 2K
Internal Battery	Rechargeable Li-Poly battery, 3.7V 4400mAH Operating time after full charge : 120min Rechargeable via AC adapter(5hrs), USB cable(12hrs)	
Computer I/F	USB 3.0 : 5Gbit/sec	
OS compatibility	Windows XP / VISTA / 7 / 8 / 10 (Windows XP requires exFAT patch update) MAC OS 10.6.5 or later, Linux 2.4.18 or later	
Power	Recommended : DC 12V/2A Operational range : DC ±6~25V =C± Operated by USB bus power during the computer connection	
Weight	430g / 0.95lb (with hard drive)	
Dimension	154 x 91 x 33 (mm) / 6 x 3.6 x 1.3 (inches)	
Contents	NVS2801-Plus main unit / AC power adapter / USB3.0 cable / Rubber bumpers / Manual / D-tap cable	

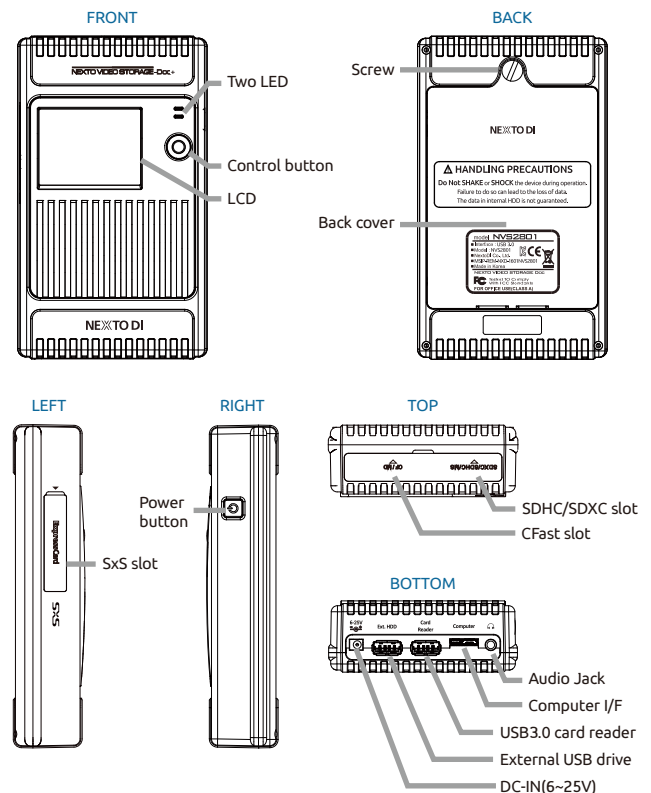

NE X TO DI

E-702 Digital Empire B/D 16, Deogyong-daero 1556 beon-gil,
Yeongtong-gu, Suwon-si, Gyeonggi-do, 443-702 Korea
Tel. +82(0)313035370 Fax. +82(0)313035380 www.nextodi.com

©2017 NextoDI Co., Ltd. All rights reserved.
Features and specifications subject to change without notice.
"NextoDI", "NEXTO VIDEO STORAGE DOC", "NVS", "NVS2801" and "X-Copy" are registered trademarks and property of NextoDI Co., Ltd. Republic of Korea
"Sony" "SxS PRO" and "SxS PRO+" are registered trademarks of Sony Corporation, Japan.
"Panasonic" and "P2/P2E" are registered trademarks of Panasonic Corporation, Japan.
"CompactFlash" is a registered trademark of Sandisk Corp. "SD" is a trademark of SD Card.
"Windows" is registered trademark of Microsoft Corporation, US.
"Mac OS" is a trademark of Apple Inc. in the USA and other countries.
All other trademarks are the property of their respective owners.